


LAB400

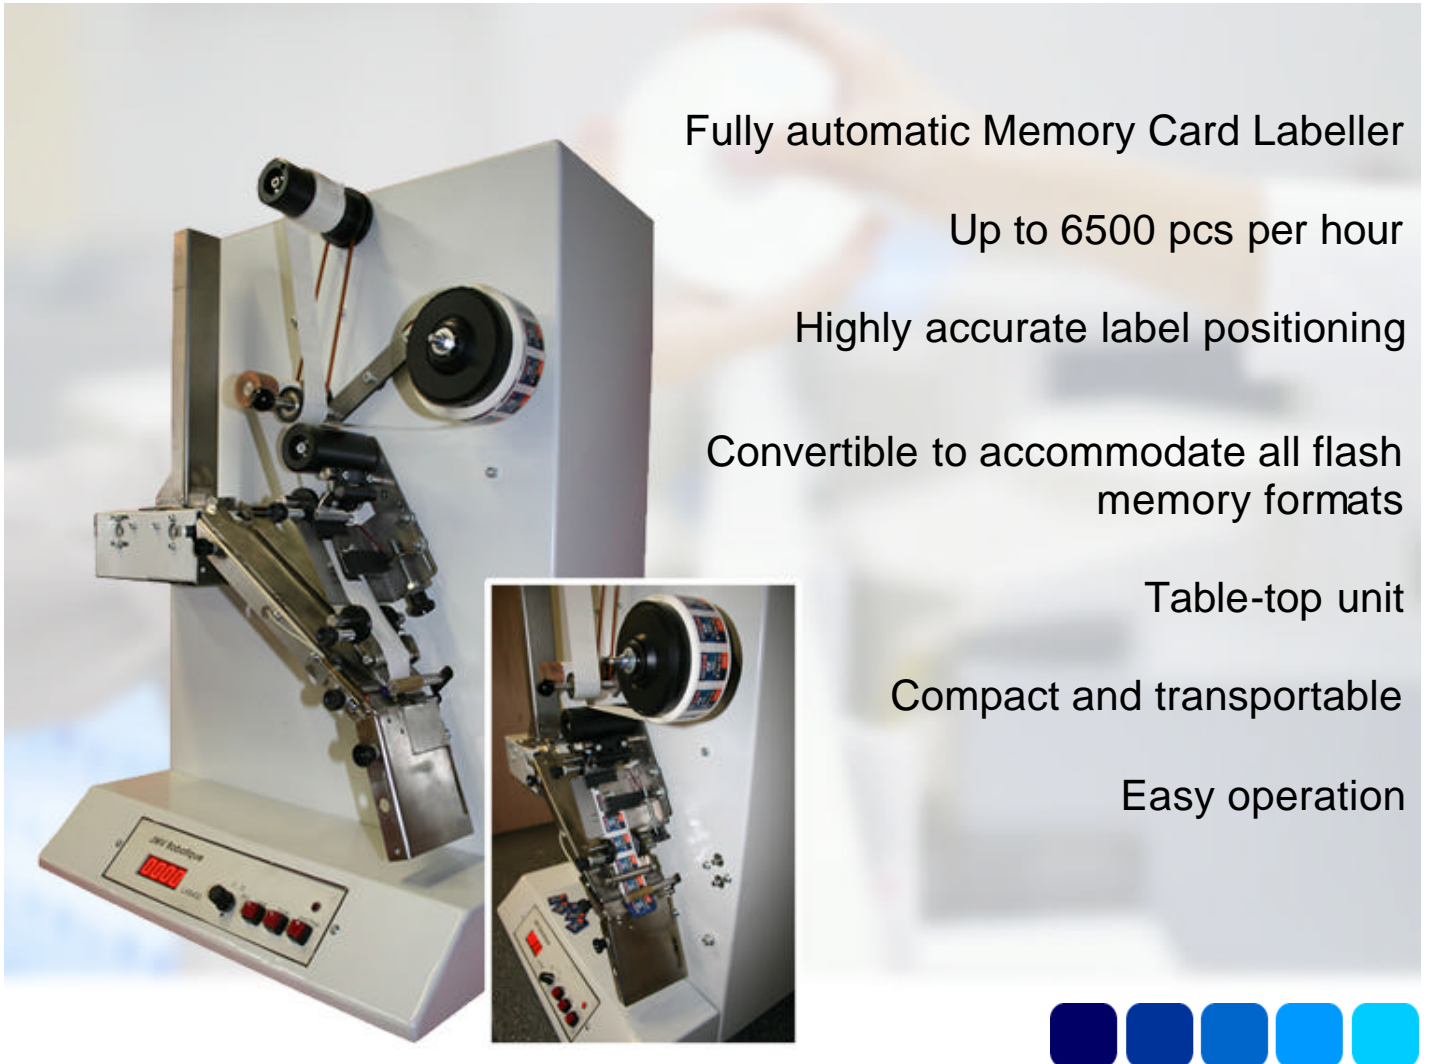

Fully automatic Memory Card Labeller

Up to 6500 pcs per hour

Highly accurate label positioning

Convertible to accommodate all flash
memory formats

Table-top unit

Compact and transportable

Easy operation

The LAB400 memory card labeller has been designed to apply labels accurately and quickly to flash memory cards, typically on SD cards, at a rate of up to 6500 pieces per hour.

Operation of the LAB400 is easy. Memory cards are automatically fed from a hopper to the label head, where a pre-printed label is applied with a high level of placement accuracy. Labelled cards can then be collected in a tote bin or an optional output receiver which stacks the labelled cards neatly for further processing (packing, wrapping, etc.).

Input hopper

The removable input hopper, which can typically accommodate up to 300 cards, can also be refilled without stopping the machine and because the input hopper is removable, it can be loaded with memory cards in advance. Additional input hoppers are also available. The LAB400 can be used as a standalone unit or can be easily incorporated in a production conveyor line.

THE LAB400 is available as an SD card labeller or a Compact Flash card labeller, however whichever format you choose, conversion kits can be purchased so that the LAB400 can accommodate other flash memory card formats. Designed specifically for Flash Memory, the LAB400 sets a new standard in labeling efficiency. Labels are applied in a fraction of the time required to manually apply them which increases productivity by up to 400% and reduces labeling errors.

Machine specifications

Media compatibility :	SD Cards & Mini SD Cards Compact Flash I & II Cards MMC Cards Smart Media Xd Picture Cards Microdrive Memory Stick (MS), Memory Stick Pro, Memory Stick Duo & Memory Stick Pro Duo Type of media should be specified at time of order. Conversion kits may be required to accommodate different media types.
Throughput:	Up to 6500 per hour (depending on package size)
Dimensions (W x H x D) :	442mm x 610mm x 362mm 17.4 x 24" x 14.2"
Power:	110-220v, 50/60Hz (self-adjustable)
Weight:	26kg (57lbs)
Label specifications	
Roll diameter:	Up to 250mm (9.8")
Roll spindle diameter:	40 x 76mm (1.6" x 3") with optional adapter
Label dimensions:	Minimum height: 15mm (0.6") Maximum height: 54mm (2.1") Minimum width: 10mm (0.39") Maximum width: 60mm (2.36") Maximum width of label liner: 64mm (2.52")
Label Roll Core dimensions:	Label Roll Core Minimum Diameter: 30mm (1.18") Label Roll Core Maximum Diameter 75mm (2.95")



Warranty

12 months back to base, all parts and labour included.
Extended warranties also available.

Options

Additional removable input hoppers.
Hopper Conversion Kits
Removable output receiver